

Type	C10-G1X/ ... V Standard relay 1 open contact for high DC load Contact Ag Sn O2 to high inrush		
Maximum contact load	10 A/250 V AC1	0,8 A/110 V DC1	
	10 A/30 V DC1	0,4 A/220 V DC1	
Recommended minimum contact load	10 mA/10 V Code 0,5		
	5 mA/5 V Code 8		

Contacts			
Material	Standard	Code 0	AgNi
	Optional	Code 8	AgNi +10 µ Au
	Optional	Code 5	Ag SnO2
Rated current			10 A
Switch-on current max. (20 ms)			30 A (120 A for code 5)
Switching voltage max.			250 V
AC load (Fig 1)			2,5 kVA
DC load			see Fig. 2

Coil			
Coil resistance			see table; tolerance ± 10 %
Pick-up voltage			≤ 0,8 x U _N
Release voltage			≥ 0,1 x U _N
Nominal power			1,1 VA (AC)/0,7 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	290	45	12	224	53
48	1200	23	24	742	32
115	7.300	9,5	48	3.500	13,7
230	28.800	4,7	110	19.900	5,5

Insulation	Volt rms, 1 min
Contact open	2000 V
Contact/coil	5 kV
Insulation resistance at 500 V	≥ 1 GΩ
Insulation, IEC 61810-1	4 kV/3

Specifications


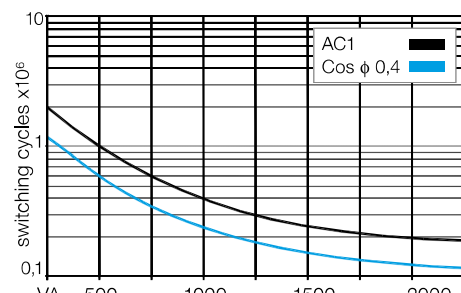
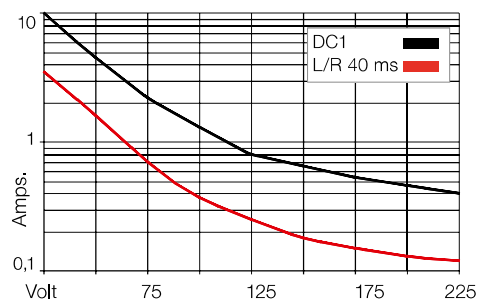
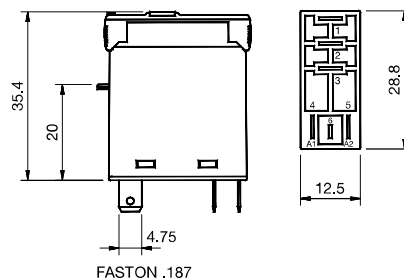
Ambient temperature operation/storage	-40 (no ice)...70 °C /-40 ... 80 °C
Pick-up time/bounce time	10 ms/≤ 1 ms
Release time/bounce time	8 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥ 100000 switching cycles
Switching frequency at rated load	≤ 1200/h
Protection class	IP40
Weight	21 g

Standard types**VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)****LED****RC suppressor****VDC 12, 24, 48, 110****LED****Polarity and free wheeling diode****AC/DC bridge rectifier 24 V, 48 V**
C10-G10/AC ... V
C10-G10X/AC ... V
C10-G10R/AC...V
C10-G10/DC ... V
C10-G10X/DC ... V
C10-G10FX/DC ... V
C10-G10BX/DC ... V
C10-G15/AC ... V
C10-G15X/AC ... V
C10-G15R/AC...V
C10-G15/DC ... V
C10-G15X/DC ... V
C10-G15FX/DC... V
C10-G15BX/UC... V

"... " Enter the voltage for full type designation

Accessories

Socket:

S10, S10-M, S10-P**Connection diagram**Gap:
1 mm**Fig. 1 AC voltage endurance****Fig. 2 DC load limit curve****Dimensions [mm]****Technical approvals, conformities**

IEC 61810; EN 60947