



Type	C90-A4x/...V Standard relays 4 change-over contacts		
Maximum contact load	5 A / 50 V AC 1, 5 A / 30 V DC1		
Recommended minimum contact load	10 mA / 10 V C90-A41/...V 5 mA / 5 V C90-A42/...V		
Contacts			
Material	Standard	C90-A41/...V	AgNi
	Optional	C90-A42/...V	AgNi + 5 µ Au
Rated current	5 A		
Switch-on current max. (20 ms)	15 A		
Switching voltage max (same polarity)	250 V		
AC load (Fig. 1)	1.250 kVA		
DC load	see Fig. 2		

Coil					
Coil resistance	see table; tolerance ± 10 %				
Operating voltage range	0.8...1.1 × U _N				
Release voltage	≥ 0.2 × U _N (AC) / ≥ 0.1 × U _N (DC)				
Nominal power	1.5 VA (AC) / 1 W (DC)				

Coil Table

VAC	Ω	mA	VDC	Ω	mA
24	190	53	12	140	86
48	770	25	24	600	40
120	4K7	12	48	2K4	20
230	17K	6	110	12K5	8,8
240	19K1	5,3			

Insulation

Pulse (1.2 / 50 µs) / Dielectric strength (V rms, 1 minute)	
Contact / coil	4 kV / 2 kV
Contact / contact	2.5 kV / 2 kV
Contact / open	1.5 kV / 1 kV

Specifications

Ambient temperature operation / storage	-40 (no ice) ...60 °C / -40...80 °C
Pick-up time / bounce time	10 ms / ≤ 3 ms
Release time / bounce time	6 ms / ≤ 1 ms
Mechanical life ops	AC: 10 Mill. / DC: 20 Mill.
DC voltage endurance at rated load	≥ 100000 switching cycles
Protection class	RT1
Weight	36 g

Standard types

V AC 50 Hz / 60 Hz: 24, 28, 120, 230, 240
LED

V DC 50 Hz / 60 Hz: 12, 24, 48, 110
LED

Free wheeling diode

C90-A41/AC...V
C90-A41X/AC...V

C90-A42/AC...V
C90-A42X/AC...V

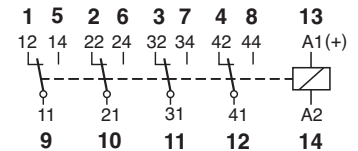
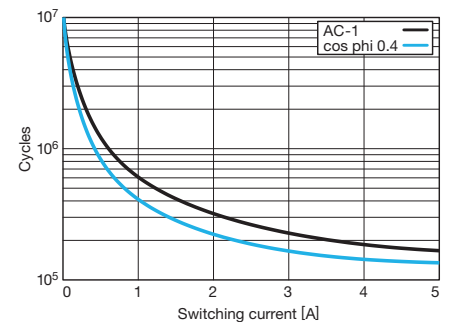
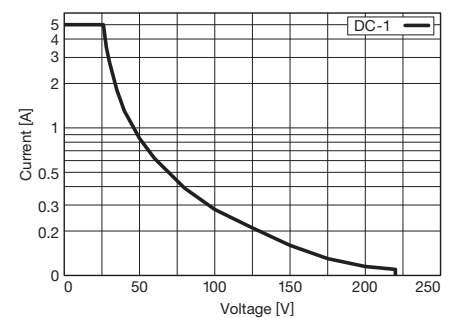
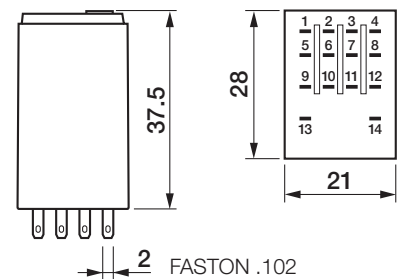
C90-A41/DC...V
C90-A41X/DC...V
C90-A41DX/DC...V

C90-A42/DC...V
C90-A42X/DC...V
C90-A42DX/DC...V

«...» Enter the voltage for the full type designation

Accessories

Socket: **S9-M, S9-L, S9-P, S9-P0**

Connection diagram**Fig. 1 AC voltage endurance****Fig. 2 DC load limit curve****Dimensions [mm]****Technical approvals, conformities**