

S9-PI
14-pin C9 Relay socket | Push-In



Table with 2 columns: General data / Optional Accessories and specifications. Rows include Rated load (6 A / 250 V), Dielectric strength, Cross-section of connecting wire, Mounting, and various accessories like Retaining clip, Bridge A2, etc.

Table with 2 columns: Applicable tools and specifications. Row includes Operation tool (ISO 2380-1 Shape A, width: 2.5 mm).




fig. 1. Wiring diagram


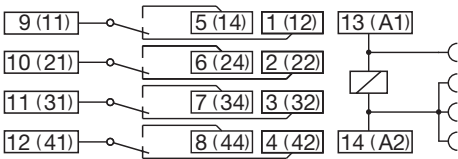


fig. 2. Dimension (mm)

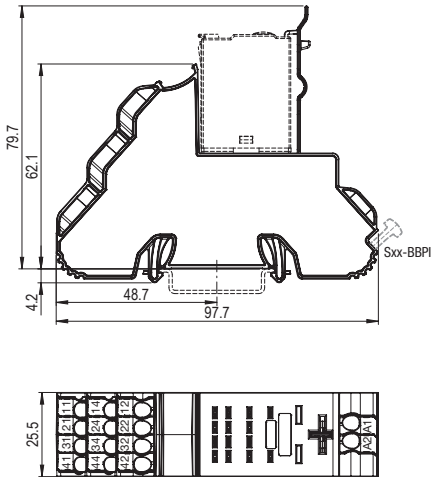

Technical approvals, conformities

Standards EN 60664-1
Approvals CE, UL, VDE, etc.